

**FROMM**

packaging  
systems



***P300***

***Electric sealless plastic strapping tool***



# P300


## Electric sealless plastic strapping tool


Strapping qualities	Polypropylene (PP) and Polyester (PET)	
Strapping dimensions:	widths	10.0 - 16.0 mm / $\frac{3}{8}$ - $\frac{5}{8}$ "
	thicknesses	0.40 - 0.80 mm / .016 - .031"
Weights	4.3 kg / 9.4 lbs without suspension 4.4 kg / 9.7 lbs with suspension	
Average seal strength	approx. 75 % (dependent on strap quality)	
Sealing method	Friction weld seal	
Strap tension	infinitely variable adjustment up to max. 1600 N / 360 lbs	
Tension speed	170 mm/s / 6.7"/s	
Suspension (optional)	Universal suspension bracket; has to be ordered separately	
Accessories	Bottom base wearing protection plate	




### The advantages

- the tool allows efficient strapping of pallets, cartons, bales and packages of various types at low costs
- the operation of the tool is simple and the tensioning and sealing of the straps are accomplished in seconds
- the infinitely variable tensioning adjustment system guarantees an appropriate strap tension for every type of package
- the sealing time is set individually for a specific strap quality and thickness and a high seal strength is assured

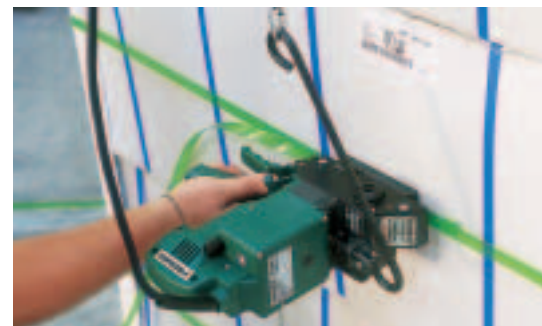

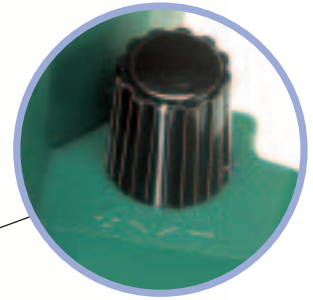

**Strap tension knob**  
Allows easy adjustment of the strap tension.

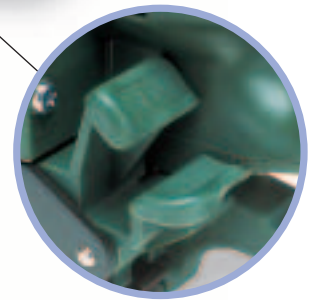


**Operation levers**  
The ergonomically arranged tensioning and sealing levers permit a quick operation of the tool.



**Seal**  
The proven friction weld technology guarantees a high seal joint efficiency.

### **Applications**

A very suitable plastic strapping tool for stationary applications in a wide variety of industries.

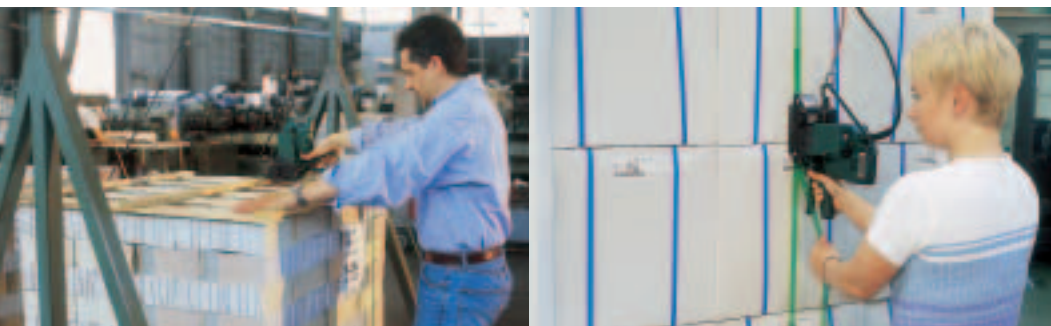

**Chart of types Model P300**

43. **XX X X**

CD	V	Hz	Countries
10	230	50	CH
11	230	50	A, B, BG, BIH, BOL, BY, CL, CZ, D, DK, DZ, E, EAS, EST, ET, F, GE, GR, H, HK, HR, I, IL, IND, IR, IRO, IS, JOR, KWT, L, LAR, LT, LV, MA, MC, MK, MOC, NL, P, PK, PL, PRC, PY, RA, RCH, RI, RL, RO, ROU, RUS, SK, SLO, SYR, THA, TN, TR, UA, UAE, YU
13	230	50	BRN, BRU, CY, EAK, GB, IRL, M, MAL, OM, SGP, Y
14	230	50	FIN, N, S
15	230	50	Z, ZA, ZW
18	230	60	BR, KSA, PE, ROK, RP, YV
19	230	50	AUS, NZ
91	110	50	GB
92	100	50	J
93	100	60	J
96	115	60	BR
97	110	50	JA, YV
99	115	60	C, CDN, CO, CR, DOM, EC, GCA, LB, KSA, MEX, NIC, PA, Puerto Rico, RC-Taiwan, RP, USA, YV

CD	Width mm	inch
1	10.0	3/8"
2	11.1	7/16"
3	12.0	
4	12.7	1/2"
5	13.0	
6	15.0	
7	15.5	
8	16.0	5/8"

CD	Thicknesses/Quality mm	inch	strap
4	0.40-0.64	.016-.025	PP
5	0.70-0.80	.028-.031	PP
6	0.40-0.64	.016-.025	PET
7	0.70-0.80	.028-.031	PET

CD = Code



**Accessories**

Item No.	Description
P30.1407	Universal suspension bracket (standard, vertical, horizontal)
P30.1411	Bottom base wearing protection plate

